



DULEVO
FAYAT GROUP



DT7
Street Sweeper



Efficiency and flexibility

The great flexibility of use allows for easy deployment in the city, on country roads and in large areas such as motorways, forecourts and airports.



Robust

Robust construction achieved by adopting quality materials and components.

Truck chassis

Dulevo equipment can of course be applied to the chassis of trucks of various makes including: Iveco, Scania and Mercedes.



High efficiency of suction

High suction capacity is ensured by the independent auxiliary motor.



Sweeping

Dust and debris are collected by means of a suction mouth, rotating brush and central roller.

Suction

Suction can take place alternately on either the right or left side.

Simple maintenance

The absence of electronic boards also allows for easy and quick detection of any malfunctions, and much quicker and cheaper repair in the event of a breakdown without the need for specialist technicians.





Designed for People

A comfortable and pleasant sweeper to use even after many hours of work.



Pressurisation system

The pressurisation system by means of filtered air supply maintains a clean and comfortable working environment inside the cabin.

Wireless

wireless radio control for managing of all functions of the waste container.



Intuitive controls

control panel is located on the side of the driver's seat in a convenient position within easy reach of the operator.

Versions DT7

They guarantee the customer the highest levels of performance in every context.



PRO and H Versions

PRO and H versions, trolley with push brush, The suction unit is mounted on a towed trolley, designed to adapt to different conditions of use, including sweeping in areas where there is a large amount of material. It is possible to manually adjust the outer outlet of the trolley to the working position. The trolley is equipped with a robust steel side bumper. For this trolley, the side brush is available in a pushed version.



STD and D versions

STD and D versions, trolley with trailed brush, The suction unit is fixed on a trailed trolley. A ball joint allows the trolley to adapt to different road conditions. The wheels of the trolley are of the type with a die-cast aluminium rim and elastic rubber ring. For this trolley, the side brush is only available in the towed version. It is not possible to adjust the outer travel of the trolley.

Applications

The wide choice of optional extras and accessories also allows customisation according to specific sweeping needs.




Front brush

- Telescopic pneumatic right-sided front brush
- Fixed front brush right-hand side Double
- Fixed front brush right and left side


Washing system

High-pressure or low-pressure with hose reel for washing with lance or facilitator arm. Manually adjustable front wash bar

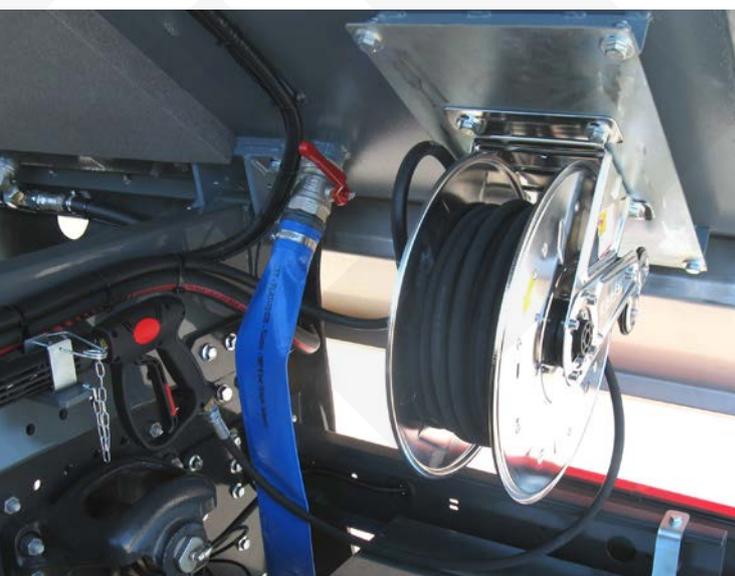

The variety of options

Allows you to expand the operational spectrum of the Dulevo DT7, anywhere, anytime.

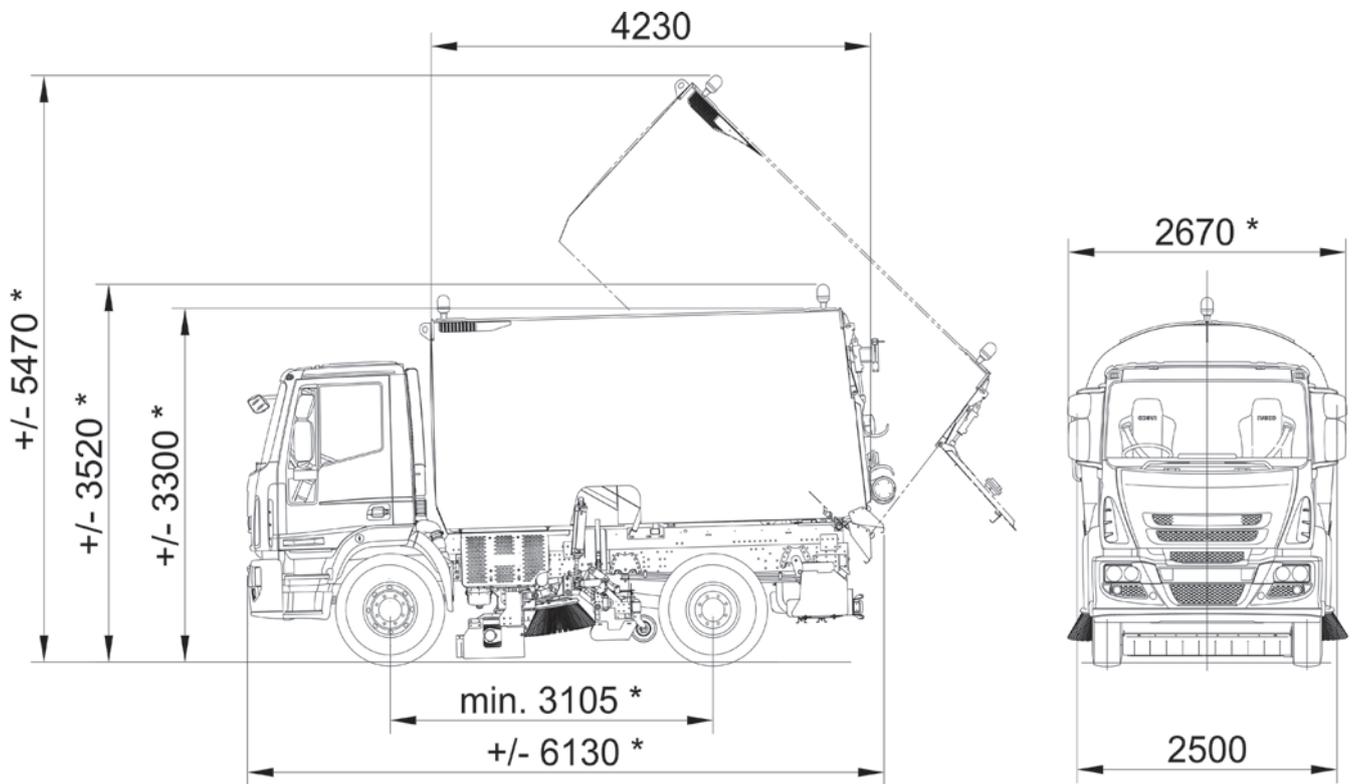

Technical Data

DT7

Cleaning track:

- With central brush

mm

1800

- With centre brush and side brushes

mm

2200

- With centre brush, side brushes and third brush

mm

2700

Waste container volume

m³

6

Height of container discharge (OPT.)

mm

1150 (2400)

Cabin seats (OPT.)

n°

2

Hourly output

m²/h

40.500

Maximum speed

Km/h

90

Turning circle diameter

mm

12000

PM Certification

PM 2,5 / PM10****

Auxiliary engine brand

Deutz

Engine emissions

Stage IV - Tier 4

Power supply

Diesel



Specifications are not binding for our company and subject to change at any time without notice



DULEVO

FAYAT GROUP



Dulevo International S.p.A.
Via Giovannino Guareschi, 1
43012 Fontanellato (PR) Italia
Tel: +39-0521-827711
Fax: +39-0521-827795
www.dulevo.com